

HOLE_Step



Hole Step completa la serie Hole Ground con le versioni da incasso a parete, dedicate all'illuminazione dei percorsi esterni. Il corpo è realizzato in pressofusione di alluminio verniciato e si incassa a parete grazie alla specifica cassaforma in PVC già preforata per il passaggio dei cavi di collegamento. Il corpo ottico dell'apparecchio si inserisce nella cassaforma alloggiandosi in un apposito housing di acciaio garantendo il perfetto posizionamento a filo muro. Il vetro frontale di Hole è verniciato in colore bianco opaco o nero opaco e caratterizza l'estetica dell'apparecchio. Hole Step monta un LED CoB in posizione arretrata per emettere luce verso il basso ed evitare qualsiasi forma di abbagliamento. L'apparecchio è precablato con cavo di alimentazione in neoprene H05RN-F di 40 cm. di lunghezza.

Hole Step completes the Hole Ground series with wall-mounted recessed versions designed for outdoor pathway lighting. The body is made of painted die-cast aluminum and is recessed into the wall using a specific pre-drilled PVC casing for cable passage. The optical body of the fixture fits into the casing, housed in a dedicated steel housing, ensuring a perfect flush wall positioning. Hole's front glass is painted in matte white or matte black, defining the fixture's aesthetics. Hole Step features a recessed LED CoB positioned to emit light downward and prevent any form of glare. The fixture comes pre-wired with a 40 cm neoprene H05RN-F power cable.







EXTENDED COLLECTION



✚ HOLE_Ground pag 102

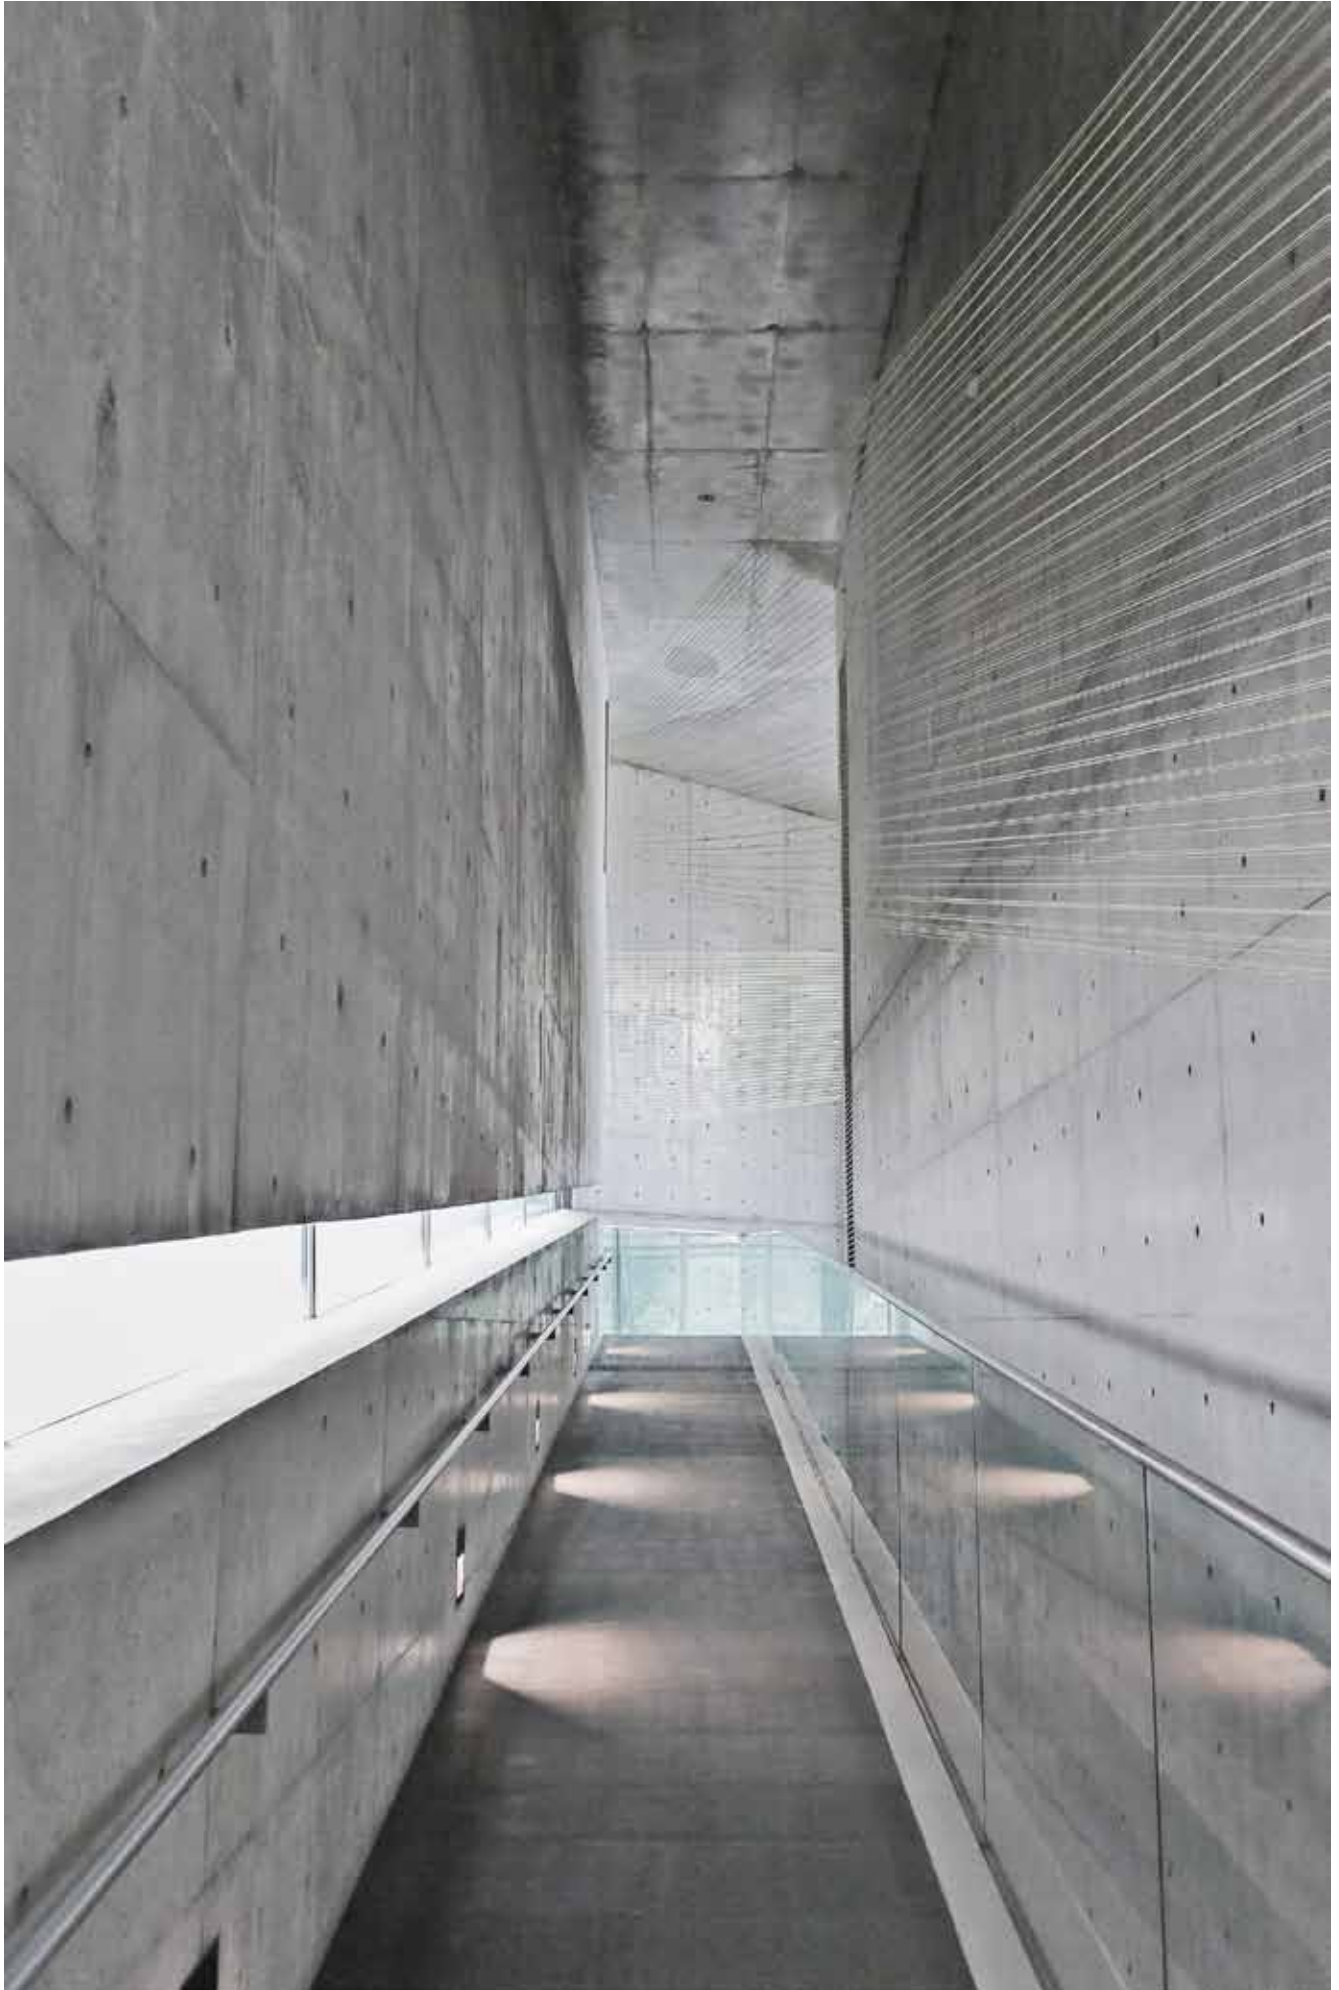




High comfort step light

Gli apparecchi della serie Hole Step si alloggiavano nella scatola in PVC predisposta con housing in acciaio per la perfetta installazione a filo parete. La ventosa fornita in dotazione facilita l'estrazione dell'apparecchio dalla scatola e consente l'accesso all'impianto elettrico per le operazioni di manutenzione

The fixtures in the Hole Step series are housed in the PVC box, which is equipped with a steel housing for a perfect flush wall installation. The provided suction cup makes it easy to remove the fixture from the box and allows access to the electrical system for maintenance operations.

Optical Info p. 269

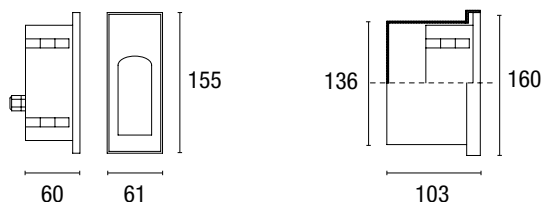

Model	Colour	Power	Source	Lumen Output	CCT	Optic	Weight	Code
Asymmetric	Black	6 W	CoB Led	460 lm	3000 K	32°	0,60 kg	EST58011
	White	6 W	CoB Led	460 lm	3000 K	32°	0,60 kg	EST58012