





# LUNOS MINI

# DATI TECNICI

Technical Data

### INSTALLAZIONE

Installazione a parete, soffitto, fissaggio a terra

### PROTEZIONE

IP 65 - IK 07

### CORPO

Alluminio pressofuso

### SCHERMO

Vetro extrachiaro temperato da 4 mm serigrafato

### GUARNIZIONI

Gomma EPDM a celle chiuse

### VITERIA

Acciaio Inox A2

### VERNICIATURA / FINITURA

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

### ASSEMBLY / USAGE

Wall, ceiling and stand installation

### PROTECTION

IP 65 - IK 07

### BODY

Die-cast aluminium

### SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

### SEALS



Closed-cell EPDM rubber

### SCREWS

Stainless steel A2

### PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

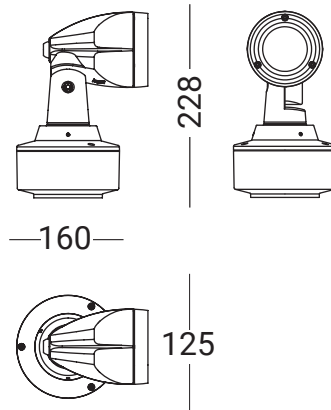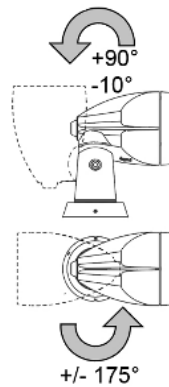

9650W

### Versione Ac

**NB** 20° FASCIO STRETTO - NARROW BEAM

**WB** 40° FASCIO LARGO - LARGE BEAM


### Versione led cob

**NB** 10° FASCIO STRETTO - NARROW BEAM

**MB** 26° FASCIO MEDIO - MEDIUM BEAM

**WB** 56° FASCIO LARGO - LARGE BEAM


3000K - 4000K

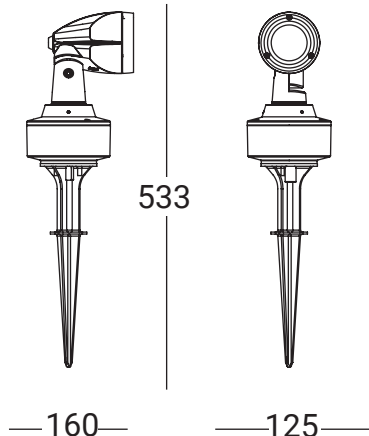

9650P



# LUNOS MINI




## Proiettore LED Alimentazione Diretta / Projector LED DIRECT AC

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>9650W/WCA.NB</b>	Spot/20° Spot/20°	7W	680 lm	476 lm	220-240Vac 50/60Hz	3000K	I 65 07	>80
<b>9650W/WCA.WB</b>	Largo/40° Wide Flood/40°	7W	680 lm	476 lm	220-240Vac 50/60Hz	3000K	I 65 07	>80
<b>9650W/NCA.NB</b>	Spot/20° Spot/20°	7W	700 lm	490 lm	220-240Vac 50/60Hz	4000K	I 65 07	>80
<b>9650W/NCA.WB</b>	Largo/40° Wide Flood/40°	7W	700 lm	490 lm	220-240Vac 50/60Hz	4000K	I 65 07	>80

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: Non dimmerabile / Dimming: Not dimmable

<b>AC9650</b>	Visiera in acciaio verniciato Painted steel visor	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
<b>AB9650</b>	Braccio per estensione a Parete/Soffitto L=500mm Extension Arm for Wall/Ceiling L=500mm		



## Proiettore LED Alimentazione Diretta con Picchetto / Projector with Spike LED DIRECT AC

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>9650P/WCA.NB</b>	Spot/20° Spot/20°	7W	680 lm	476 lm	220-240Vac 50/60Hz	3000K	I 65 07	>80
<b>9650P/WCA.WB</b>	Largo/40° Wide Flood/40°	7W	680 lm	476 lm	220-240Vac 50/60Hz	3000K	I 65 07	>80
<b>9650P/NCA.NB</b>	Spot/20° Spot/20°	7W	700 lm	490 lm	220-240Vac 50/60Hz	4000K	I 65 07	>80
<b>9650P/NCA.WB</b>	Largo/40° Wide Flood/40°	7W	700 lm	490 lm	220-240Vac 50/60Hz	4000K	I 65 07	>80


Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: Non dimmerabile / Dimming: Not dimmable


<b>AC9650</b>	Visiera in acciaio verniciato Painted steel visor	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
---------------	--	------------------	--



**AC9650** Visore anti-abbagliamento in Acciaio verniciato a polvere poliestere. Viteria inclusa  
Stainless Steel Anti-glare Convejaor threated with Polyester Powder. Screws Included



**AB9650** Braccio per estensione a Parete/Soffitto L=500mm (altre misure a richiesta). Acciaio verniciato a polvere poliestere. Viteria e connettori IP68 inclusi  
Extension Arm for Wall/Ceiling L=500mm (other measures on request). Stainless Steel threated with polyester powder. Screws and IP68 connectors included



# LUNOS MINI


## Proiettore LED COB-Driver incorporato / Projector LED COB- Built-in driver

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK CRI
<b>9650W/WC0.NB</b>	Spot/10° Spot/10°	15W	1590 lm	1110 lm	220-240Vac 50/60Hz	3000K	I 65 07 >80
<b>9650W/WC0.MB</b>	Medio/26° Flood/26°	15W	1590 lm	1110 lm	220-240Vac 50/60Hz	3000K	I 65 07 >80
<b>9650W/WC0.WB</b>	Largo/56° Wide Flood/56°	15W	1590 lm	1020 lm	220-240Vac 50/60Hz	3000K	I 65 07 >80
<b>9650W/NC0.NB</b>	Spot/10° Spot/10°	15W	1650 lm	1170 lm	220-240Vac 50/60Hz	4000K	I 65 07 >80
<b>9650W/NC0.MB</b>	Medio/26° Flood/26°	15W	1650 lm	1170 lm	220-240Vac 50/60Hz	4000K	I 65 07 >80
<b>9650W/NC0.WB</b>	Largo/56° Wide Flood/56°	15W	1650 lm	1080 lm	220-240Vac 50/60Hz	4000K	I 65 07 >80

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: Non dimmerabile / Dimming: Not dimmable

<b>AC9650</b>	Visiera in acciaio verniciato Painted steel visor	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
<b>AB9650</b>	Braccio per estensione a Parete/Soffitto L=500mm Extension Arm for Wall/Ceiling L=500mm		



## Proiettore LED COB con Picchetto-Driver incorporato / Projector with Spike LED COB- Built-in driver

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK CRI
<b>9650P/WC0.NB</b>	Spot/10° Spot/10°	15W	1590 lm	1110 lm	220-240Vac 50/60Hz	3000K	I 65 07 >80
<b>9650P/WC0.MB</b>	Medio/26° Flood/26°	15W	1590 lm	1110 lm	220-240Vac 50/60Hz	3000K	I 65 07 >80
<b>9650P/WC0.WB</b>	Largo/56° Wide flood/56°	15W	1590 lm	1020 lm	220-240Vac 50/60Hz	3000K	I 65 07 >80
<b>9650P/NC0.NB</b>	Spot/10° Spot/10°	15W	1650 lm	1170 lm	220-240Vac 50/60Hz	4000K	I 65 07 >80
<b>9650P/NC0.MB</b>	Medio/26° Flood/26°	15W	1650 lm	1170 lm	220-240Vac 50/60Hz	4000K	I 65 07 >80
<b>9650P/NC0.WB</b>	Largo/56° Wide flood/56°	15W	1650 lm	1080 lm	220-240Vac 50/60Hz	4000K	I 65 07 >80

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: Non dimmerabile / Dimming: Not dimmable

<b>AC9650</b>	Visiera in acciaio verniciato Painted steel visor	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
---------------	--	------------------	--



**AC9650** Visore anti-abbagliamento in Acciaio verniciato a polvere poliestere. Viteria inclusa  
Stainless Steel Anti-glare Convejer treated with Polyester Powder. Screws Included



**AB9650** Braccio per estensione a Parete/Soffitto L=500mm (altre misure a richiesta). Acciaio verniciato a polvere poliestere. Viteria e connettori IP68 inclusi  
Extension Arm for Wall/Ceiling L=500mm (other measures on request). Stainless Steel treated with polyester powder. Screws and IP68 connectors included