

## BLOOM MINI - BLOOM



**BLOOM MINI FLOODLIGHT**  
H65 L46 W58

15° FASCIO STRETTO - NARROW BEAM

30° FASCIO MEDIO - MEDIUM BEAM

40° FASCIO LARGO - WIDE BEAM



**BLOOM FLOODLIGHT**  
H90 L67 W68

10° FASCIO STRETTO - NARROW BEAM

24° FASCIO MEDIO - MEDIUM BEAM

36° FASCIO LARGO - WIDE BEAM

Proiettori dalle dimensioni ridotte  
Floodlights with reduced dimensions

55

00

01

10

24

25

30

35

40

**BLOOM MINI BOLLARD**  
PAG. 354







# BLOOM MINI FLOODLIGHT

# DATI TECNICI

Technical Data

## INSTALLAZIONE

Installazione a parete, soffitto, fissaggio a terra

## PROTEZIONE

IP 66 - IK 08

## CORPO

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

## SCHERMO

Vetro extrachiario trasparente da 6mm

## GUARNIZIONI

Gomma EPDM stampata

## VITERIA

Acciaio Inox A2

## VERNICIATURA / FINITURA

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

## ASSEMBLY / USAGE

Wall, ceiling and stand installation

## PROTECTION

IP 66 - IK 08

## BODY

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

## SCREEN

Transparent extra-clear glass 6mm

## SEALS

Closed-cell EPDM rubber


## SCREWS

Stainless steel A2

## PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

- NB** 15° FASCIO STRETTO - NARROW BEAM
- MB** 30° FASCIO MEDIO - MEDIUM BEAM
- WB** 40° FASCIO LARGO - WIDE BEAM




2700K - 3000K - 4000K


### Versione in Tensione - Constant voltage (Vdc)

2W con DRIVER REMOTO 24Vdc - 2W REMOTE DRIVER 24Vdc

### Versione in Corrente - Constant current (mA)

2W con DRIVER REMOTO MAX 700mA DC - 2W REMOTE DRIVER max 700mA DC

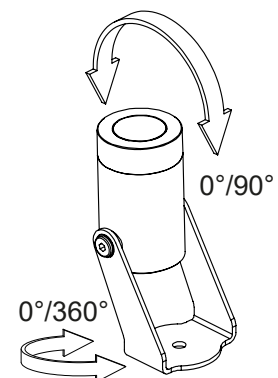



# BLOOM MINI FLOODLIGHT

## Proiettore Orientabile -Driver remoto 24Vdc / Adjustable Projector -Remote driver 24Vdc

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>5000W/HRRCNB</b>	Spot/15° Spot/15°	2W	170 lm	103 lm	24Vdc	2700K	III	66	08	80
<b>5000W/HRRCMB</b>	Medio/30° Flood/30°	2W	170 lm	125 lm	24Vdc	2700K	III	66	08	80
<b>5000W/HRRCWB</b>	Largo/40° Wide Flood/40°	2W	170 lm	120 lm	24Vdc	2700K	III	66	08	80
<b>5000W/WRRCNB</b>	Spot/15° Spot/15°	2W	170 lm	130 lm	24Vdc	3000K	III	66	08	80
<b>5000W/WRRCMB</b>	Medio/30° Flood/30°	2W	170 lm	125 lm	24Vdc	3000K	III	66	08	80
<b>5000W/WRRCWB</b>	Largo/40° Wide Flood/40°	2W	170 lm	120 lm	24Vdc	3000K	III	66	08	80
<b>5000W/NRRCNB</b>	Spot/15° Spot/15°	2W	190 lm	150 lm	24Vdc	4000K	III	66	08	80
<b>5000W/NRRCMB</b>	Medio/30° Flood/30°	2W	190 lm	145 lm	24Vdc	4000K	III	66	08	80
<b>5000W/NRRCWB</b>	Largo/40° Wide Flood/40°	2W	190 lm	140 lm	24Vdc	4000K	III	66	08	80


Vetro extrachiaro trasparente da 6mm / Transparent extra-clear glass 6mm

Dimmerazione: Non dimmerabile / Dimming: Not dimmable

Informazioni sugli accessori a fine capitolo o da pag. 463 e sito. information on accessories at the end of the chapter or from page. 463 and website.

<b>KIT.022</b>	Kit picchetto/Spike Kit H235x40x30	<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm² IP68 Connection Box 4-ways/5-Poles 5x4mm²
<b>KIT.027</b>	Cinghia per proiettori Bloom Mini e Bloom L2000xH25 Strap for Bloom Mini & Bloom Floodlights L2000xH25	<b>E.TRA.577</b>	Driver ON/OFF - 25W 24Vdc IP67 1 Driver for 1-8 Lamps L148xW40xH32
<b>E.CAV.540.020</b>	Cavo/Cable 05RN-F 2x0,75 2mt	<b>E.TRA.579</b>	Driver ON/OFF - 100W 24Vdc IP67 1 Driver for 9-30 Lamps L140xW63xH32
<b>E.CAV.540.050</b>	Cavo/Cable 05RN-F 2x0,75 5mt	<b>E.TRA.631</b>	Driver ON/OFF - 15W 24Vdc IP20 1 Driver for 1-5 Lamps L106xW33xH22
<b>E.CAV.540.100</b>	Cavo/Cable 05RN-F 2x0,75 10mt	<b>E.TRA.632</b>	Driver ON/OFF - 70W 24Vdc IP20 1 Driver for 1-25 Lamps L124xW80xH22
<b>MOR682P/2V</b>	Connettore IP68 2Vie/2Poli 2x1mm² IP68 Connector 2ways/2Poles 2x1mm²	<b>HUB.24V.001.ND</b>	Hub 24Vdc IP66 - ON/OFF con driver 70W 1 Hub for 1-8 Lamps L235xW200xH92
<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm² IP68 Connection Box 3-ways/5-Poles 5x4mm²		





# BLOOM MINI FLOODLIGHT

## Proiettore Orientabile -Driver remoto max 700mA DC / Adjustable Projector -Remote driver max 700mA DC

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>5000W/HRCCNB</b>	Spot/15° Spot/15°	2W	220 lm	170 lm	max 700mA DC	2700K	III	66	08	80
<b>5000W/HRCCMB</b>	Medio/30° Flood/30°	2W	220 lm	165 lm	max 700mA DC	2700K	III	66	08	80
<b>5000W/HRCCWB</b>	Largo/40° Wide Flood/40°	2W	220 lm	162 lm	max 700mA DC	2700K	III	66	08	80
<b>5000W/WRCCNB</b>	Spot/15° Spot/15°	2W	220 lm	170 lm	max 700mA DC	3000K	III	66	08	80
<b>5000W/WRCCMB</b>	Medio/30° Flood/30°	2W	220 lm	165 lm	max 700mA DC	3000K	III	66	08	80
<b>5000W/WRCCWB</b>	Largo/40° Wide Flood/40°	2W	220 lm	162 lm	max 700mA DC	3000K	III	66	08	80
<b>5000W/NRCCNB</b>	Spot/15° Spot/15°	2W	240 lm	188 lm	max 700mA DC	4000K	III	66	08	80
<b>5000W/NRCCMB</b>	Medio/30° Flood/30°	2W	240 lm	183 lm	max 700mA DC	4000K	III	66	08	80
<b>5000W/NRCCWB</b>	Largo/40° Wide Flood/40°	2W	240 lm	180 lm	max 700mA DC	4000K	III	66	08	80

Vetro extrachiaro trasparente da 6mm / Transparent extra-clear glass 6mm

Dimmerazione: DALI dimmerabile remoto / Dimming: Remote DALI dimmable

Informazioni sugli accessori a fine capitolo o da pag. 463 e sito. information on accessories at the end of the chapter or from page. 463 and website.

<b>KIT.022</b>	Kit picchetto/Spike Kit H235x40x30	<b>E.TRA.623.700</b> 1 Driver for 1-14 Lamps	Driver ON/OFF - 36W 700mA IP20 L163xW30xH21
<b>KIT.027</b>	Cinghia per proiettori Bloom Mini e Bloom L2000xH25 Strap for Bloom Mini & Bloom Floodlights L2000xH25	<b>E.TRA.634.700</b> 1 Driver for 1-20 Lamps	Driver ON/OFF - 60W 700mA IP20 L124xW80xH22
<b>E.CAV.540.020</b>	Cavo/Cable 05RN-F 2x0,75 2mt	<b>E.TRA.635.700</b> 1 Driver for 1-20 Lamps	Driver DALI2 - 60W 700mA IP20 L124xW80xH22
<b>E.CAV.540.050</b>	Cavo/Cable 05RN-F 2x0,75 5mt	<b>E.TRA.636.700</b> 1 Driver for 1-20 Lamps	Driver CASAMBI - 60W 700mA IP20 L124xW80xH22
<b>E.CAV.540.100</b>	Cavo/Cable 05RN-F 2x0,75 10mt	<b>E.TRA.553.700</b> 1 Driver for 1-8 Lamps	Driver ON/OFF - 20W 700mA IP67 L120xW38xH25
<b>MOR682P/2V</b>	Connettore IP68 2Vie/2Poli 2x1mm <sup>2</sup> IP68 Connector 2ways/2Poles 2x1mm <sup>2</sup>	<b>E.TRA.584.700</b> 1 Driver for 1-14 Lamps	Driver DALI2 - 30W 700mA IP68 L121xW53xH26
<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm <sup>2</sup> IP68 Connection Box 3-ways/5-Poles 5x4mm <sup>2</sup>	<b>HUB.700.001.ND</b> 1 Hub for 1-8 Lamps	Hub 700mA IP66 - ON/OFF con driver 60W IP20 L235xW200xH92
<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm <sup>2</sup> IP68 Connection Box 4-ways/5-Poles 5x4mm <sup>2</sup>	<b>HUB.700.001.DA2</b> 1 Hub for 1-8 Lamps	Hub 700mA IP66 - DALI2 con driver 60W IP20 L235xW200xH92
<b>E.TRA.621.700</b>	Driver ON/OFF - 20W 700mA IP20 L111xW52xH22	<b>HUB.700.001.CA</b> 1 Hub for 1-8 Lamps	Hub 700mA IP66 - CASAMBI con driver 60W IP20 L235xW200xH92

# BLOOM MINI FLOODLIGHT ACCESSORI Accessories


## FIXING ACCESSORIES



**KIT.022** Kit picchetto per proiettore/Floodlight Spike kit H235x40x30

**KIT.027** Cinghia per proiettori Bloom Mini/Bloom Strap for Bloom Mini & Bloom Floodlights

## CONNESSIONE - CONNECTION



**E.CAV.540.020** Cavo/Cable 05RN-F 2x0,75 - 2mt

**E.CAV.540.050** Cavo/Cable 05RN-F 2x0,75 - 5mt

**E.CAV.540.100** Cavo/Cable 05RN-F 2x0,75 - 10mt



**MOR682P/2V** Connettore IP68 2Vie/2Poli - 2x1mm<sup>2</sup>  
IP68 Connector 2ways/2poles - 2x1mm<sup>2</sup>




**MOR685P/3VS** Scatola di connessione IP68 3Vie/5Poli. Sez.max.  
IP68 Connection Box 3-ways/5-poles



**MOR685P/4VS** Scatola di connessione IP68 4Vie/5Poli - 5x4mm<sup>2</sup>  
IP68 Connection Box 4-ways/5-poles - 5x4mm<sup>2</sup>

## ALIMENTATORI - DRIVER - ELECTRONICS 24Vdc in Tensione - Constant voltage 24Vdc

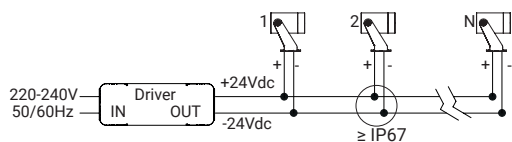

Collegamento in Parallelo  
Parallel Wiring



**E.TRA.631** Driver 15W 24Vdc IP20 - ON/OFF  
1 Driver for 1-5 Lamps




**E.TRA.632** Driver 70W 24Vdc IP20 - ON/OFF  
1 Driver for 1-25 Lamps



**E.TRA.577** Driver 25W 24Vdc IP67 - ON/OFF  
1 Driver for 1-8 Lamps




**E.TRA.579** Driver 100W 24Vdc IP67 - ON/OFF  
1 Driver for 9-30 Lamps



**HUB.24V.001.ND** Hub 24Vdc IP66 - ON/OFF con driver 70W  
1 Hub for 1-8 Lamps

## ALIMENTATORI - DRIVER - ELECTRONICS 700mA in Corrente - Constant current 700mA

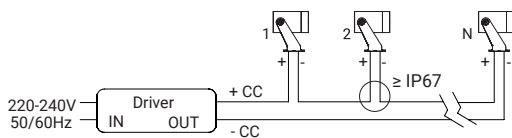

Collegamento in Serie  
Series Wiring



**E.TRA.621.700** Driver 20W 700mA IP20 - ON/OFF  
1 Driver for 1-8 Lamps



**E.TRA.623.700** Driver 36W 700mA IP20 - ON/OFF  
1 Driver for 1-14 Lamps



**E.TRA.634.700** Driver 60W 700mA IP20 - ON/OFF  
1 Driver for 1-20 Lamps



**E.TRA.635.700** Driver 60W 700mA IP20 - DALI2  
1 Driver for 1-20 Lamps



**E.TRA.636.700** Driver 60W 700mA IP20 - CASAMBI  
1 Driver for 1-20 Lamps




**E.TRA.553.700** Driver 20W 700mA IP67 - ON/OFF  
1 Driver for 1-8 Lamps



**E.TRA.584.700** Driver 30W 700mA IP68 - DALI2  
1 Driver for 1-14 Lamps



Schemi Hub da pag. 468 e sito. Hub diagrams from page. 468 and website.



**HUB.700.001.ND** Hub 700mA IP66 - ON/OFF con driver 60W IP20  
1 Hub for 1-8 Lamps



**HUB.700.001.DA2** Hub 700mA IP66 - DALI2 con driver 60W IP20  
1 Hub for 1-8 Lamps



**HUB.700.001.CA** Hub 700mA IP66 - CASAMBI con driver 60W IP20  
1 Hub for 1-8 Lamps