

# NEMO

Un programma completo ideale supporto per ogni necessità illuminotecnica. Retail, Show room, Residential, Hospitality, Office, General lighting: le nostre soluzioni risolvono brillantemente ogni impiego garantendo alti standard qualitativi. Efficienze elevate con emissioni da 500 a 3500 lm. Installazioni fisse, orientabili, con basso indice UGR, trimless, IP 54; ampio range di temperature di colore: 2700K - 3000K - 4000K, tunable white. Piani ottici differenziati secondo specifici utilizzi, scelte estetiche variabili per colori e modelli. Le principali gestioni elettroniche completano la proposta.

A full range of products ideal for every lighting need. Retail, Show room, Residential, Hospitality, Office, General lighting: Nemo range can offer high colour quality (CRI>92) and Prime brand LED. Emissions from 500 to 3500 lm. Fixed installations, adjustable, low UGR index, trimless, IP54. Wide range of colour temperatures: 2700K - 3000K - 4000K and tunable white. Different Optical planes according to specific uses, variable aesthetic choices thanks to a wide range of colors and models. The main electronic managements complete our proposal.



Ampia la gamma per aspetto estetico o tecnico. La sezione "RING" ha bordo a vista. "SIMPLE" ha un bordo rastremato e permette installazioni semplificate, quasi invisibili su cartongesso. L'effetto finale è molto simile alle soluzioni trimless. La serie "EYE" offre un elevato comfort visivo. Diverse le configurazioni per lampada GU10. Non mancano versioni con grado di protezione IP54.

Our Nemo offer has been extended and provide a complete lighting solution for designers and lighting specialists. "RING" range present the visible edge, "SIMPLE" have a simplified edge almost invisible on plasterboard installation. The final effect is very close to trimless solutions. The "EYE" offer high visual comfort. Also available GU10 models as well as IP54 versions.



# NEMO\_RING

## TRIMMED



Round



Adj



Fix



Comfort



Square - Round



Adj



Fix



Comfort



Square - Square



Adj



Fix




Comfort



2 Lights



Adj



Fix



Comfort



3 Lights



Adj



Fix



Comfort



CONFIGURATOR

## TRIMLESS



Round



Adj



Fix



Comfort



Square - Round



Adj



Fix



Comfort



Square - Square



Adj



Fix



Comfort



2 Lights



Adj



Fix



Comfort




3 Lights



Adj




Fix



Comfort

## NEMO\_Ring


## Trimmed\_Adj-Fix


○ Round


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
6 W	525 lm	55 mm	62 mm	81 mm	0,14 kg	IA-ABAA ■ ▲ ● □ ▼ ⋮
10 W	1075 lm	75 mm	85 mm	89 mm	0,24 kg	IA-ABAB ■ ▲ ● □ ▼ ⋮
15 W	1510 lm	75 mm	85 mm	112 mm	0,30 kg	IA-ABBC ■ ▲ ● □ ▼ ⋮
24 W	2475 lm	100 mm	112 mm	140 mm	0,55 kg	IA-ACCD ■ ▲ ● □ ▼ ⋮
33 W	3440 lm	125 mm	140 mm	169 mm	0,95 kg	IA-ACDE ■ ▲ ● □ ▼ ⋮
42 W	4275 lm	150 mm	165 mm	184 mm	1,32 kg	IA-ADEF ■ ▲ ● □ ▼ ⋮

□ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

◐ Square Round


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	92 mm	102 mm	104 mm	0,29 kg	IA-BBAB ■ ▲ ● □ ▼ ⋮
15 W	1510 lm	92 mm	102 mm	127 mm	0,35 kg	IA-BBBC ■ ▲ ● □ ▼ ⋮
24 W	2475 lm	125 mm	135 mm	161 mm	0,64 kg	IA-BCCD ■ ▲ ● □ ▼ ⋮
33 W	3440 lm	155 mm	165 mm	194 mm	1,10 kg	IA-BDDE ■ ▲ ● □ ▼ ⋮

□ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				6W	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	RTL28011	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

## \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	White	2700 K	8°	Matt	On/Off
Adj	Black	3000 K	15°	Mirror	Phase Cut/IGBT-TRIAC
		4000 K	24°	Titanium	Push
		Tunable # ** ** *	38°	Gold	0-1/10 V
			55° **	White	DALI **
				Matt Bronze	Casambi **
				Red	
				Yellow	

\*\* No: 6W

\*\*\* No: 42W

# Only: DALI (DT8), Casambi


• only: 10W - 15W

NEMO\_Ring

## Trimmed\_Comfort



## Round




Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	85 mm	107 mm	0,20 kg	IA-ABAB ■ △ ● □ ▼ ⋮
15 W	1390 lm	75 mm	85 mm	130 mm	0,27 kg	IA-ABBC ■ △ ● □ ▼ ⋮
24 W	2280 lm	100 mm	112 mm	165 mm	0,47 kg	IA-ACCD ■ △ ● □ ▼ ⋮
33 W	3165 lm	125 mm	140 mm	200 mm	0,83 kg	IA-ACDE ■ △ ● □ ▼ ⋮
42 W	3930 lm	150 mm	165 mm	229 mm	1,13 kg	IA-ADEF ■ △ ● □ ▼ ⋮

□ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Square Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	92 mm	102 mm	120 mm	0,25 kg	IA-BBAB ■ △ ● □ ▼ ⋮
15 W	1390 lm	92 mm	102 mm	147 mm	0,32 kg	IA-BBBC ■ △ ● □ ▼ ⋮
24 W	2280 lm	125 mm	135 mm	185 mm	0,55 kg	IA-BCCD ■ △ ● □ ▼ ⋮
33 W	3165 lm	155 mm	165 mm	230 mm	0,98 kg	IA-BDDE ■ △ ● □ ▼ ⋮

□ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Valori  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

## \* Select your option


Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White Black	2700 K 3000 K 4000 K Tunable *** #	8° 15° 24° 38° 55°	White Matt Silver Matt Black Matt Bronze Red Yellow	On/Off Phase Cut/IGBT-TRIAC Push 0-1/10 V DALI Casambi
	W B	1 2 3 4	5 1 2 3 4	E F G H I L	NF PC PU AN DA CA

\*\*\* No: 42W

# Only: DALI (DT8), Casambi

• only: 10W - 15W

## Trimmed\_Comfort


  Square Square


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	85 mm	107 mm	0,21 kg	IA-EBAB ■ △ ● □ ▼ ⋮
15 W	1390 lm	75 mm	85 mm	130 mm	0,27 kg	IA-EBBC ■ △ ● □ ▼ ⋮
24 W	2280 lm	100 mm	112 mm	165 mm	0,49 kg	IA-ECCD ■ △ ● □ ▼ ⋮
33 W	3165 lm	125 mm	140 mm	200 mm	0,87 kg	IA-ECDE ■ △ ● □ ▼ ⋮
42 W	3930 lm	150 mm	165 mm	229 mm	1,14 kg	IA-EDEF ■ △ ● □ ▼ ⋮

□ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				10W	15W	24W	33W	42W	
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid				/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

## \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White Black	2700 K 3000 K 4000 K Tunable *** #	8° 15° 24° 38° 55°	White Matt Silver Matt Black Matt Bronze Red Yellow	On/Off Phase Cut/IGBT-TRIAC Push 0-1/10 V DALI Casambi
	W B	1 2 3 4	5 1 2 3 4	E F G H I L	NF PC PU AN DA CA

\*\*\* No: 42W

# Only: DALI (DT8), Casambi

• only: 10W - 15W




HIGH  
VISUAL  
COMFORT




## NEMO\_Ring

## Trimmed\_Adj-Fix


 2 Lights


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>2x 10 W</b>	2150 lm	92x180 mm	102x192 mm	104 mm	0,54 kg	<b>IA-CDCG</b> ■ ▲ ● □ ▼ ::
<b>2x 15 W</b>	3020 lm	92x180 mm	102x192 mm	127 mm	0,67 kg	<b>IA-CDDI</b> ■ ▲ ● □ ▼ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

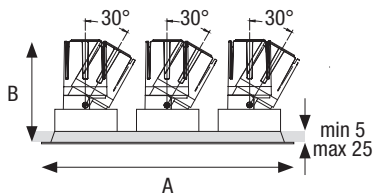 3 Lights


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>3x 10 W</b>	3230 lm	92x270 mm	102x282 mm	104 mm	0,79 kg	<b>IA-DEDH</b> ■ ▲ ● □ ▼ ::
<b>3x 15 W</b>	4525 lm	92x270 mm	102x282 mm	127 mm	0,98 kg	<b>IA-DEEL</b> ■ ▲ ● □ ▼ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum	IP	Weight	Code					
	Recessing hole			/	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	<b>DRV9092</b>	<b>DRV9092</b>	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	<b>RTL28012</b>	<b>RTL28012</b>	/	/	/

Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529


## \* Select your option

Version	■	Ring color	▲	CCT	●	Optic	□	Reflector color	▼	Control	::
Fix	A	White	W	2700 K	1	8°	5	Matt	A	On/Off	NF
Adj	B	Black	B	3000 K	2	15°	1	Mirror	B	Phase Cut/IGBT-TRIAC	PC
				4000 K	3	24°	2	Titanium	C	Push	PU
				Tunable #	4	38°	3	Gold	D	0-1/10 V	AN
						55°	4	White	E	DALI	DA
								Matt Bronze	H	Casambi	CA
								Red	I		
								Yellow	L		

# Only: DALI (DT8), Casambi


## NEMO\_Ring

## Trimmed\_Comfort


 2 Lights


Power	Lumen output	Hole size	Product dimension		Weight	* code to complete
			A	B		
<b>2x 10 W</b>	1980 lm	92x180 mm	102x192 mm	120 mm	0,47 kg	<b>IA-CDCG</b> ■ ▲ ● □ ▼ ⋮
<b>2x 15 W</b>	2775 lm	92x180 mm	102x192 mm	147 mm	0,60 kg	<b>IA-CDDI</b> ■ ▲ ● □ ▼ ⋮

☐ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

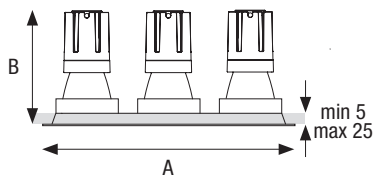 3 Lights


Power	Lumen output	Hole size	Product dimension		Weight	* code to complete
			A	B		
<b>3x 10 W</b>	2970 lm	92x270 mm	102x282 mm	120 mm	0,69 kg	<b>IA-DEDH</b> ■ ▲ ● □ ▼ ⋮
<b>3x 15 W</b>	4165 lm	92x270 mm	102x282 mm	147 mm	0,88 kg	<b>IA-DEEL</b> ■ ▲ ● □ ▼ ⋮

☐ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	<b>DRV9092</b>	<b>DRV9092</b>	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	<b>RTL28012</b>	<b>RTL28012</b>	/	/	/

Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529


## \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	8°	White	On/Off
		3000 K	15°	Matt Silver	Phase Cut/IGBT-TRIAC
	4000 K	24°	Matt Black	Push	
	Tunable #	38°	Matt Bronze	0-1/10 V	
		55°	Red	DALI	
			Yellow	Casambi	

# Only: DALI (DT8), Casambi

## NEMO\_Ring


## Trimless\_Adj-Fix


 Round


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
6 W	525 lm	55 mm	85 mm	81 mm	0,14 kg	IB-ABAA ■ △ ● □ ▼ ⋮
10 W	1075 lm	75 mm	110 mm	89 mm	0,24 kg	IB-ABAB ■ △ ● □ ▼ ⋮
15 W	1510 lm	75 mm	110 mm	112 mm	0,31 kg	IB-ABBC ■ △ ● □ ▼ ⋮
24 W	2475 lm	100 mm	150 mm	140 mm	0,55 kg	IB-ACCD ■ △ ● □ ▼ ⋮
33 W	3440 lm	125 mm	202 mm	169 mm	0,97 kg	IB-ACDE ■ △ ● □ ▼ ⋮
42 W	4275 lm	150 mm	232 mm	184 mm	1,32 kg	IB-ADEF ■ △ ● □ ▼ ⋮

□ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

 Square


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	85 mm	120 mm	104 mm	0,28 kg	IB-BBAB ■ △ ● □ ▼ ⋮
15 W	1510 lm	85 mm	120 mm	127 mm	0,34 kg	IB-BBBC ■ △ ● □ ▼ ⋮

□ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum	IP	Weight	Code					
				Recessing hole	6W	10W	15W	24W	33W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	RTL28011	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

## \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	White	2700 K	8° *	Matt	On/Off
Adj		3000 K	15°	Mirror	Phase Cut/IGBT-TRIAC*
		4000 K	24°	Titanium	Push
		Tunable # ** ***	38°	Gold	0-1/10 V
			55° **	White	DALI **
				Matt Bronze	Casambi **
				Red	
				Yellow	

\*\* No: 6W


\*\*\* No: 42W

# Only: DALI (DT8), Casambi

• only: 10W - 15W

## NEMO\_Ring


## Trimless\_Comfort


 Round


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	110 mm	107 mm	0,21 kg	IB-ABAB ■ ▲ ● □ ▼ ❖
15 W	1390 lm	75 mm	110 mm	130 mm	0,28 kg	IB-ABBC ■ ▲ ● □ ▼ ❖
24 W	2280 lm	100 mm	150 mm	165 mm	0,47 kg	IB-ACCD ■ ▲ ● □ ▼ ❖
33 W	3165 lm	125 mm	202 mm	200 mm	0,85 kg	IB-ACDE ■ ▲ ● □ ▼ ❖
42 W	3930 lm	150 mm	232 mm	229 mm	1,14 kg	IB-ADEF ■ ▲ ● □ ▼ ❖

☑ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

 Square


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	85 mm	120 mm	128 mm	0,24 kg	IB-BBAB ■ ▲ ● □ ▼ ❖
15 W	1390 lm	85 mm	120 mm	150 mm	0,31 kg	IB-BBBC ■ ▲ ● □ ▼ ❖

☑ 220÷240Vac | IP40down - IP20up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum	IP	Weight	Code					
				Recessing hole	/	10W	15W	24W	33W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

## \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	8°	White	On/Off
		3000 K	15°	Matt Silver	Phase Cut/IGBT-TRIAC*
		4000 K	24°	Matt Black	Push
		Tunable # ***	38°	Matt Bronze	0-1/10 V
			55°	Red	DALI
				Yellow	Casambi

\*\*\* No: 42W


# Only: DALI (DT8), Casambi

\*only: 10W - 15W

# Trimless\_Adj-Fix




## ●● 2 Lights



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>2x 10 W</b>	2150 lm	90x180 mm	120x210 mm	104 mm	0,53 kg	<b>IB-CDCG</b> ■ ▲ ● □ ▼ ⚡
<b>2x 15 W</b>	3020 lm	90x180 mm	120x210 mm	127 mm	0,66 kg	<b>IB-CDDI</b> ■ ▲ ● □ ▼ ⚡

☐ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## ●●● 3 Lights

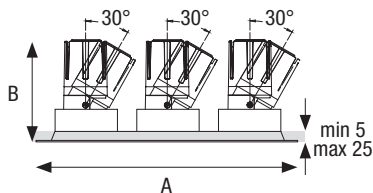

Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>3x 10 W</b>	3230 lm	90x270 mm	120x300 mm	104 mm	0,78 kg	<b>IB-DEDH</b> ■ ▲ ● □ ▼ ⚡
<b>3x 15 W</b>	4525 lm	90x270 mm	120x300 mm	127 mm	0,98 kg	<b>IB-DEEL</b> ■ ▲ ● □ ▼ ⚡

☐ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code				
				10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	DRV9092	DRV9092	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/
Honeycomb grid			0,02 kg	RTL28012	RTL28012	/	/	/

Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529


### \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	White	2700 K	8°	Matt	On/Off
Adj		3000 K	15°	Mirror	Phase Cut/IGBT-TRIAC
		4000 K	24°	Titanium	Push
		Tunable #	38°	Gold	0-1/10 V
			55°	White	DALI
				Matt Bronze	Casambi
				Red	
				Yellow	

# Only: DALI (DT8), Casambi


NEMO\_Ring

## Trimless\_Comfort


 2 Lights


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>2x 10 W</b>	1980 lm	90x180 mm	120x210 mm	128 mm	0,46 kg	<b>IB-CDCG</b> ■ ▲ ● □ ▼ ::
<b>3x 15 W</b>	2775 lm	90x180 mm	120x210 mm	150 mm	0,59 kg	<b>IB-CDDI</b> ■ ▲ ● □ ▼ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

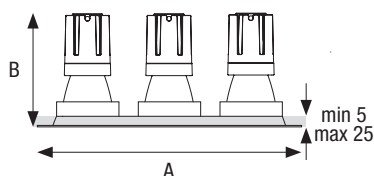 3 Lights


Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>3x 10 W</b>	2970 lm	90x270 mm	120x300 mm	128 mm	0,68 kg	<b>IB-DEDH</b> ■ ▲ ● □ ▼ ::
<b>3x 15 W</b>	4165 lm	90x270 mm	120x300 mm	150 mm	0,88 kg	<b>IB-DEEL</b> ■ ▲ ● □ ▼ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	<b>DRV9092</b>	<b>DRV9092</b>	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	<b>RTL28012</b>	<b>RTL28012</b>	/	/	/

Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529

## \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	8°	White	On/Off
		3000 K	15°	Matt Silver	Phase Cut/IGBT-TRIAC
		4000 K	24°	Matt Black	Push
		Tunable #	38°	Matt Bronze	0-1/10 V
			55°	Red	DALI
				Yellow	Casambi

# Only: DALI (DT8), Casambi

NEMO

GU10



# NEMO\_GU10



CONFIGURATOR

## TRIMMED

## TRIMLESS



Round



Adj



Fix



Adj



Fix



Square - Round



Adj



Fix



Adj



Fix



2 Lights



Adj



Fix



Adj



Fix



3 Lights



Adj



Fix



Adj



Fix




NEMO\_GU10

Trimmed\_Adj-Fix




○ Round



Power	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>max 7W</b>	GU10	75 mm	85 mm	104 mm	0,18 kg	<b>OA-AB</b> ■ ▲ ▼
☑ 220÷240Vac   IP20						Lamp not included

◼ Square



Power	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>max 7W</b>	GU10	92 mm	102x102 mm	118 mm	0,24 kg	<b>OA-BB</b> ■ ▲ ▼
☑ 220÷240Vac   IP20						Lamp not included


Optical Info p. 529

\* Select your option


Version	Ring color	Reflector color
Fix	White	Matt
Adj	Black	Mirror
		Titanium
		Gold
		White
		Matt Bronze
		Red
		Yellow

NEMO\_GU10

## Trimmed\_Adj-Fix


 2 Lights


Power	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>2x max 7W</b>	GU10	92x180 mm	102x192 mm	118 mm	0,43 kg	<b>OA-CD</b> ■ ▲ ▼
☑ 220÷240Vac   IP20						Lamp not included

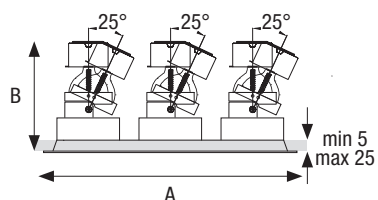 3 Lights


Socket	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>3x max 7W</b>	GU10	92x270 mm	102x282 mm	118 mm	0,64 kg	<b>OA-DE</b> ■ ▲ ▼
☑ 220÷240Vac   IP20						Lamp not included

Optical Info p. 529

## \* Select your option


Version	Ring color	Reflector color
Fix	White	Matt
Adj	Black	Mirror
		Titanium
		Gold
		White
		Matt Bronze
		Red
		Yellow

## NEMO\_GU10

## Trimless\_Adj-Fix




○ Round



Power	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>max 7W</b>	GU10	75 mm	110 mm	119 mm	0,19 kg	<b>OB-AB</b> ■ ▲ ▼
☑ 220÷240Vac   IP20						Lamp not included

◻ Square



Power	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>max 7W</b>	GU10	85 mm	120 mm	119 mm	0,24 kg	<b>OB-BB</b> ■ ▲ ▼
☑ 220÷240Vac   IP20						Lamp not included


Optical Info p. 529

## \* Select your option


Version	Ring color	Reflector color
Fix	White	Matt
Adj		Mirror
		Titanium
		Gold
		White
		Matt Bronze
		Red
		Yellow

NEMO\_GU10

## Trimless\_Adj-Fix


 2 Lights


Power	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>2x max 7W</b>	GU10	90x180 mm	120x210 mm	119 mm	0,43 kg	<b>OB-CD</b> ■ ▲ ▼
☐ 220÷240Vac   IP20						Lamp not included

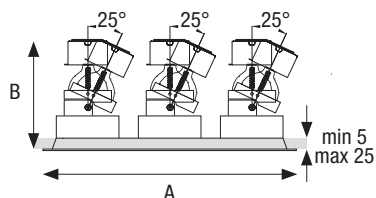 3 Lights


Power	Socket	Hole size	Product dimension		Weight	*code to complete
			A	B		
<b>3x max 7W</b>	GU10	90x270 mm	120x300 mm	119 mm	0,63 kg	<b>OB-DE</b> ■ ▲ ▼
☐ 220÷240Vac   IP20						Lamp not included

Optical Info p. 529

## \* Select your option

Version	■	Ring color	▲	Reflector color	▼
Fix	A	White	W	Matt	A
Adj	B			Mirror	B
				Titanium	C
				Gold	D
				White	E
				Matt Bronze	H
				Red	I
				Yellow	L

NEMO

S I M P L E



# NEMO\_SIMPLE




## TRIMMED

---



Round



Asymmetric



Fix

---



Square - Round



Asymmetric



Fix


---

# NEMO\_Simple



## Trimmed\_Fix


### ○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1020 lm	75 mm	84 mm	92 mm	0,21 kg	LA-ABAB ■ △ ● □ ☼
15 W	1435 lm	75 mm	84 mm	117 mm	0,28 kg	LA-ABBC ■ △ ● □ ☼
24 W	2350 lm	100 mm	110 mm	146 mm	0,49 kg	LA-ACCD ■ △ ● □ ☼
33 W	3270 lm	125 mm	138 mm	180 mm	0,87 kg	LA-ACDE ■ △ ● □ ☼
42 W	4060 lm	150 mm	164 mm	210 mm	1,23 kg	LA-ADEF ■ △ ● □ ☼

☑ 220÷240Vac | IP40down - IP20up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### ◼ Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1020 lm	75 mm	88 mm	77 mm	0,23 kg	LA-BBAB ■ △ ● □ ☼
15 W	1435 lm	75 mm	88 mm	102 mm	0,30 kg	LA-BBBC ■ △ ● □ ☼

☑ 220÷240Vac | IP40down - IP20up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

### \* Select your option

Version	Ring color	CCT	Optic	Control
Fix	White W Black B	2700 K 1 3000 K 2 4000 K 3 Tunable # *** 4	8° • 5 15° 1 24° 2 38° 3 55° 4	On/Off NF Phase Cut/IGBT-TRIAC* PC Push PU 0-1/10 V AN DALI DA Casambi CA

\*\*\* No: 42W

# Only: DALI (DT8), Casambi


• only: 10W - 15W

NEMO\_Simple

## Trimmed\_Asymmetric




### ○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	970 lm	75 mm	88 mm	92 mm	0,24 kg	<b>LA-ABAB</b> ■ ▲ ● □ ☼
15 W	1360 lm	75 mm	88 mm	117 mm	0,31 kg	<b>LA-ABBC</b> ■ ▲ ● □ ☼

☐ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### ◼ Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	970 lm	75 mm	88 mm	80 mm	0,23 kg	<b>LA-BBAB</b> ■ ▲ ● □ ☼
15 W	1360 lm	75 mm	88 mm	102 mm	0,31 kg	<b>LA-BBBC</b> ■ ▲ ● □ ☼

☐ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	<b>DRV9092</b>	<b>DRV9092</b>	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	<b>RTL28012</b>	<b>RTL28012</b>	/	/	/


Optical Info p. 530

### \* Select your option

Version	Ring color	CCT	Optic	Control
Asymmetric	White	2700 K	8°	On/Off
D	Black	3000 K	15°	Phase Cut/IGBT-TRIAC*
		4000 K	24°	Push
		Tunable #	38°	0-1/10 V
			55°	DALI
				Casambi
				NF
				PC
				PU
				AN
				DA
				CA

# Only: DALI (DT8), Casambi



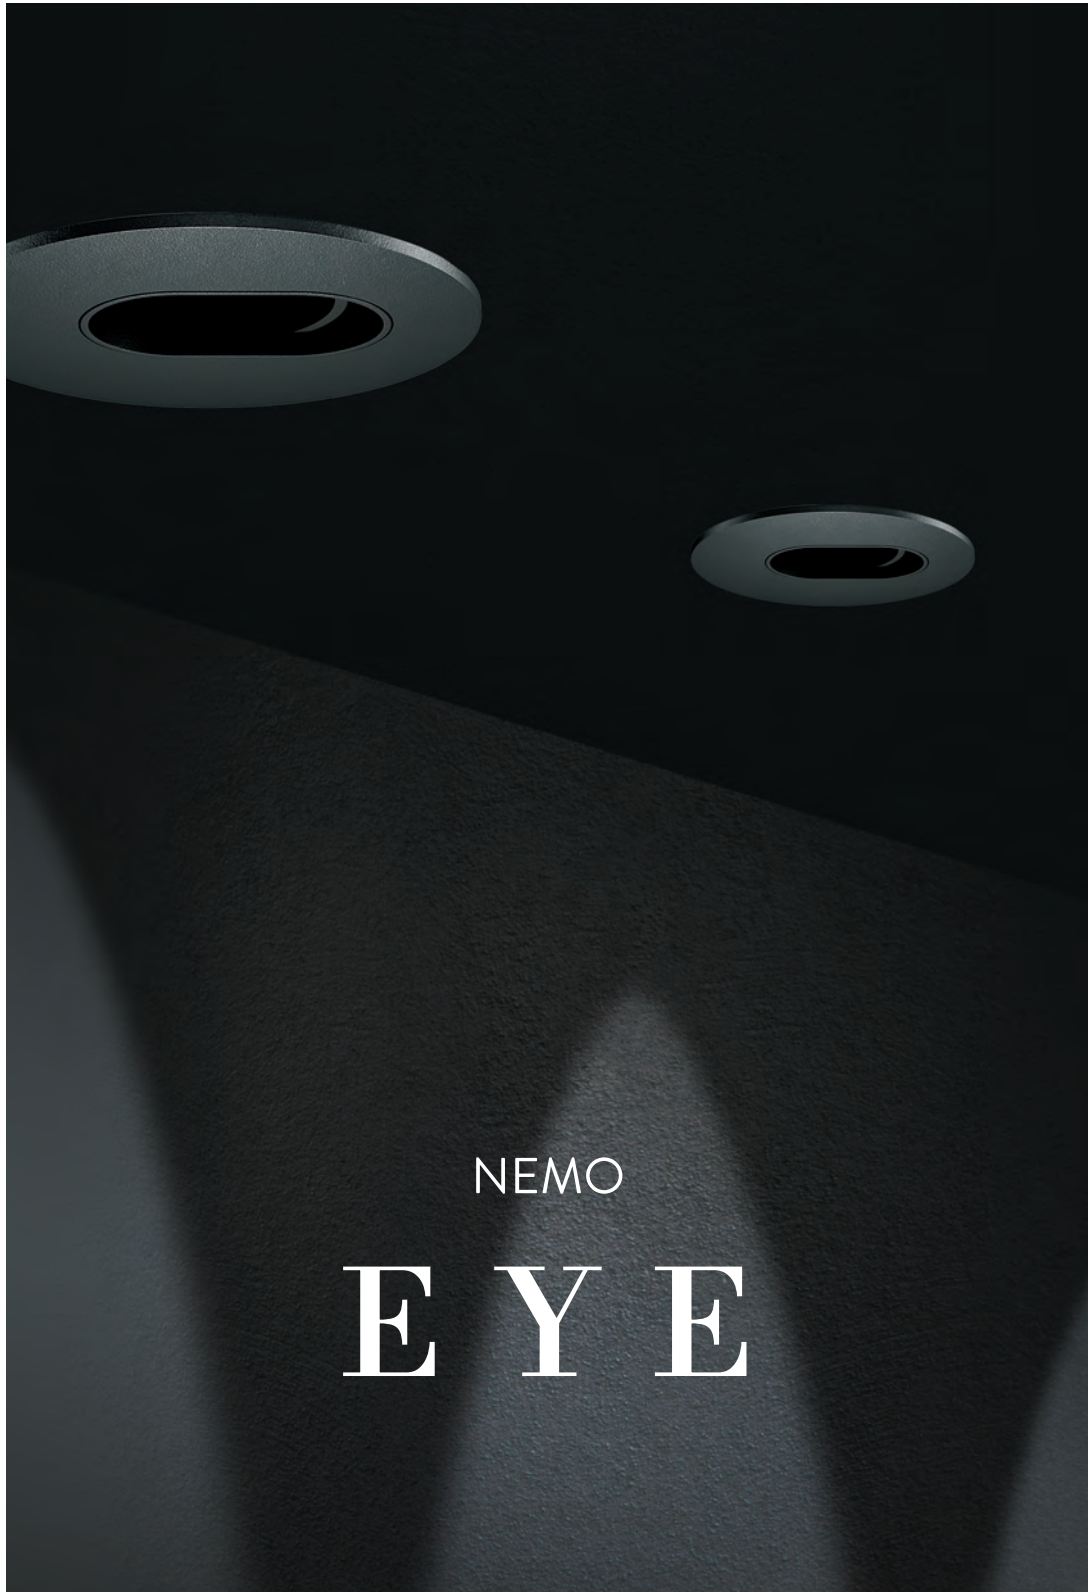

NEMO

EYE

# NEMO\_EYE




CONFIGURATOR

## TRIMMED

---



Round



Adj



Fix

---



Square - Round



Adj



Fix


---

# NEMO\_Eye



## Trimmed\_Adj-Fix


### Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
6 W	525 lm	55 mm	65 mm	80 mm	0,14 kg	<b>MA-ABAA</b> ■ ▲ ● □ ☼
10 W	1075 lm	65 mm	75 mm	83 mm	0,23 kg	<b>MA-ABAB</b> ■ ▲ ● □ ☼
15 W	1510 lm	65 mm	75 mm	106 mm	0,29 kg	<b>MA-ABBC</b> ■ ▲ ● □ ☼

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	65 mm	75 mm	83 mm	0,23 kg	<b>MA-BBAB</b> ■ ▲ ● □ ☼
15 W	1510 lm	65 mm	75 mm	106 mm	0,30 kg	<b>MA-BBBC</b> ■ ▲ ● □ ☼

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code			/	/	/
				6W	10W	15W			
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	<b>DRV9092</b>	<b>DRV9092</b>	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/

Optical Info p. 530

### \* Select your option

Version	Ring color	CCT	Optic	Control
Fix A	White W	2700 K 1	8° 5	On/Off NF
Adj B		3000 K 2	15° 1	Phase Cut/IGBT-TRIAC* PC
		4000 K 3	24° 2	Push PU
		Tunable # ** 4	38° 3	0-1/10 V AN
			55° ** 4	DALI ** DA
				Casambi ** CA

\*\* No: 6W

# Only: DALI (DT8), Casambi

• only: 10W - 15W





# NEMO\_IP54



## TRIMMED

---



Round



Fix

---



Square - Round



Fix


---

# NEMO\_IP54

## Trimmed\_Fix




### ○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	915 lm	75 mm	88 mm	85 mm	0,27 kg	NA-ABAB ■ ▲ ● □ ☼
15 W	1285 lm	75 mm	88 mm	108 mm	0,34 kg	NA-ABBC ■ ▲ ● □ ☼

☐ 220÷240Vac | IP54down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### ◻ Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	915 lm	75 mm	90 mm	70 mm	0,28 kg	NA-BBAB ■ ▲ ● □ ☼
15 W	1285 lm	75 mm	90 mm	95 mm	0,34 kg	NA-BBBC ■ ▲ ● □ ☼

☐ 220÷240Vac | IP54down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				6W	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	/	/	/	/	/

Optical Info p. 529

### \* Select your option

Version	Ring color	CCT	Optic	Control
Fix	White	2700 K	15°	On/Off
A	W	3000 K	24°	Phase Cut/IGBT-TRIAC
		4000 K	38°	Push
		Tunable #	55°	0-1/10 V
				DALI
				Casambi

# Only: DALI (DT8), Casambi

