

# QUIK

Il progetto Quik aggiunge valore nelle installazioni di lampade a parete. La flessibilità ed il livello tecnico-qualitativo delle soluzioni adottate rende Quik elemento centrale in queste applicazioni. Disponibile come singolo apparecchio in infinite misure, si può installare anche in linea continua oppure con sistemi angolari. La gamma include versioni On-Off, DALI, Push, Casambi; Accensione singola oppure doppia accensione. Grande attenzione è stata posta ai rapporti dimensionali ed estetici. Il copro lampada è realizzato in alluminio estruso e verniciato, si caratterizza per lo stile minimale ma decisamente personale e definito. La cura costruttiva ed i diversi colori disponibili rendono Quik adatto ad ogni contesto in cui si debba prevedere un apparecchio con alti contenuti tecnologici in grado di offrire prestazioni di vertice.

The Quik project adds value to wall lamp installations. The flexibility and the technical-qualitative level of the solutions adopted makes Quik a central element in these applications. Available as a single luminaire in several sizes, it can also be installed in continuous line or with angular systems. The range includes versions On-Off, DALI, Push, Casambi; Single or double switch. The focus is set on dimensional and aesthetic relations. The lamp cover is made of extruded and painted aluminum, is characterized by minimal style but definitely personal and defined. The perfect construction and the colors available make Quik suitable for any context in which you have to provide a luminaire with high technological content with top performance.





## MODEL

300

600

900

1100


1700

2200



QUIK





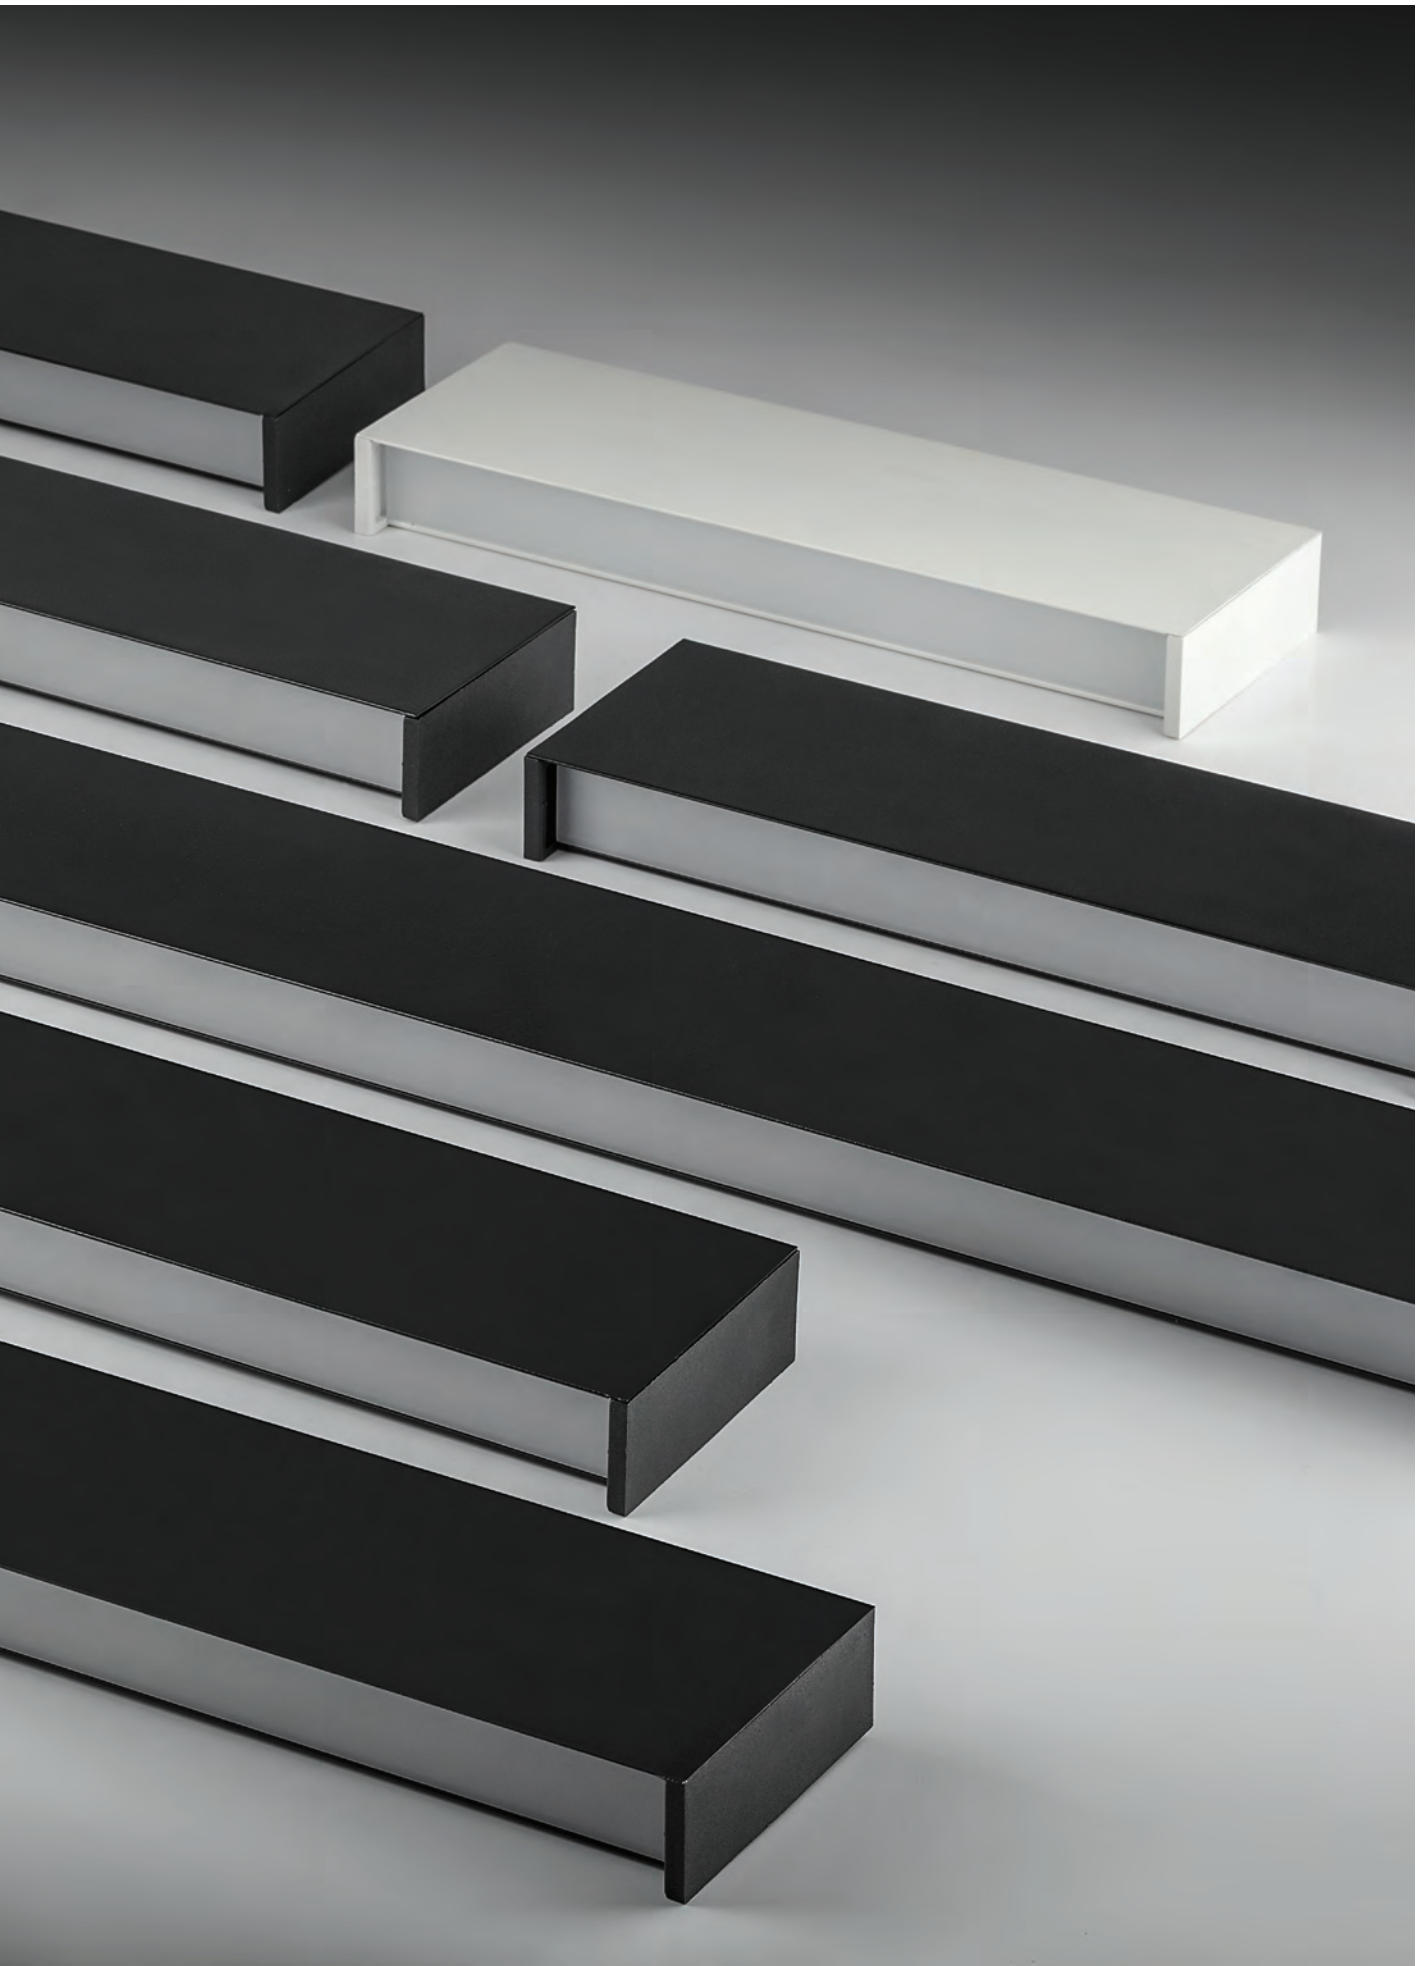

# QUIK\_Line

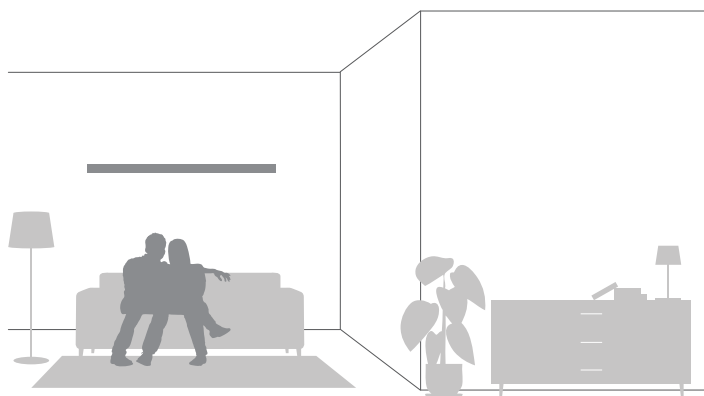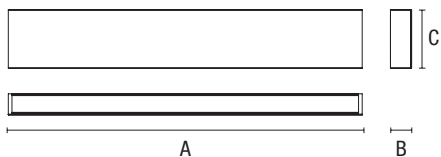

## Uplight\_Downlight

single switch

Model	Power	Lumen output		Product dimension			* code to complete
		downlight	uplight	A	B	C	
300	6+6 W	645 lm	645 lm	303 mm	35 mm	95 mm	QM-WABATA ■ ▲ ● □
600	12+12 W	1290 lm	1290 lm	582 mm	35 mm	95 mm	QM-WABAAC ■ ▲ ● □
900	18+18 W	1935 lm	1935 lm	862 mm	35 mm	95 mm	QM-WABAUD ■ ▲ ● □
1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WABABE ■ ▲ ● □
1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WABACG ■ ▲ ● □
2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WABADJ ■ ▲ ● □

dual switch

1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WACABE ■ ▲ ● □
1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WACACG ■ ▲ ● □
2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WACADJ ■ ▲ ● □

⊕ 220÷240Vac | IP40

UP to 108 lm/W | L80/B20 80.000 h. | CRI>90 | UP to R90 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - matt clear

Optical Info p. 532

### \* Select your option


CCT	■	Optic	▲	Colour	●	Control #	□
2700 K	1	Matt opal	E	White	W	On/Off	NF
3000 K	2	Matt clear	R	Black	B	DALI	DA
4000 K	3			Silver	G	Casambi	CA
Tunable **	4			Corten	C	Push	PU
				Tobacco	O		

# No 300, 600 mm - Casambi

\*\* Only: 1100, 1700, 2200 mm  
DALI, Casambi.

Quik offre grandi possibilità di customizzare secondo specifiche richieste se non previste dai modelli standard. [custom@panint.it](mailto:custom@panint.it)  
Quik offers a large possibilities to customize according to specific request as sizes, colors, long lines. [custom@panint.it](mailto:custom@panint.it)

Finishes



## QUIK\_Inside Corner



## Uplight\_Downlight

single switch	Model	Lumen output		Product dimension			* code to complete	
		downlight	uplight	A	B	C		
1	600	12+12 W	1290 lm	1290 lm	582 mm	35 mm	95 mm	QM-WABDAC ■ △ ● □
	900	18+18 W	1935 lm	1935 lm	862 mm	35 mm	95 mm	QM-WABDUD ■ △ ● □
	1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WABDBE ■ △ ● □
	1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WABDCG ■ △ ● □
	2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WABDDJ ■ △ ● □
2	600	12+12 W	1290 lm	1290 lm	582 mm	35 mm	95 mm	QM-WABEAC ■ △ ● □
	900	18+18 W	1935 lm	1935 lm	862 mm	35 mm	95 mm	QM-WABEUD ■ △ ● □
	1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WABEBE ■ △ ● □
	1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WABECG ■ △ ● □
	2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WABEDJ ■ △ ● □
dual switch	1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WACDBE ■ △ ● □
	1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WACDCG ■ △ ● □
	2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WACDDJ ■ △ ● □
	1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WACEBE ■ △ ● □
	1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WACECG ■ △ ● □
	2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WACEDJ ■ △ ● □

⊕ 220÷240Vac | IP40

UP to 108 lm/W | L80/B20 80.000 h. | CRI>90 | UP to R90 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - matt clear

Optical Info p. 532

### \* Select your option

CCT	■	Optic	△	Colour	●	Control #	□
2700 K	1	Matt opal	E	White	W	On/Off	NF
3000 K	2	Matt clear	R	Black	B	DALI	DA
4000 K	3			Silver	G	Casambi	CA
Tunable **	4			Corten	C	Push	PU
				Tobacco	O		

# No 600 mm - Casambi

\*\* Only: 1100, 1700, 2200 mm  
DALI, Casambi.

Quik offre grandi possibilità di customizzare secondo specifiche richieste se non previste dai modelli standard. [custom@panint.it](mailto:custom@panint.it)  
Quik offers a large possibilities to customize according to specific request as sizes, colors, long lines. [custom@panint.it](mailto:custom@panint.it)

Finishes


White

Black



Silver

Corten

Tobacco



## QUIK\_Outside Corner

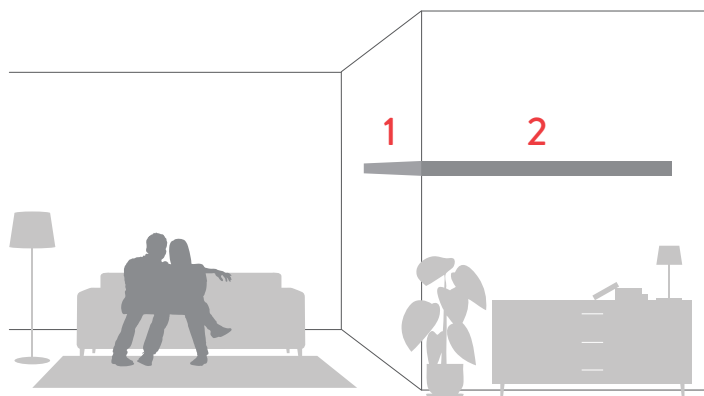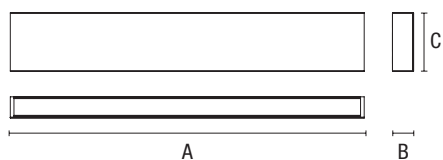

## Uplight\_Downlight

single switch	Model	Power	Lumen output		Product dimension			* code to complete
			downlight	uplight	A	B	C	
1	600	12+12 W	1290 lm	1290 lm	582 mm	35 mm	95 mm	QM-WABBAC ■ △ ● □
	900	18+18 W	1935 lm	1935 lm	862 mm	35 mm	95 mm	QM-WABBUD ■ △ ● □
	1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WABBBE ■ △ ● □
	1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WABBGG ■ △ ● □
	2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WABBDJ ■ △ ● □
2	600	12+12 W	1290 lm	1290 lm	582 mm	35 mm	95 mm	QM-WABCAC ■ △ ● □
	900	18+18 W	1935 lm	1935 lm	862 mm	35 mm	95 mm	QM-WABCUD ■ △ ● □
	1100	24+24 W	2580 lm	2580 lm	1141 mm	35 mm	95 mm	QM-WABCBE ■ △ ● □
	1700	36+36 W	3870 lm	3870 lm	1700 mm	35 mm	95 mm	QM-WABCCG ■ △ ● □
	2200	48+48 W	5160 lm	5160 lm	2259 mm	35 mm	95 mm	QM-WABCDJ ■ △ ● □

dual switch	Model	Power	Lumen output	Product dimension	* code to complete		
						A	B
1	1100	24+24 W	2580 lm	1141 mm	35 mm	95 mm	QM-WACBBE ■ △ ● □
	1700	36+36 W	3870 lm	1700 mm	35 mm	95 mm	QM-WACBCG ■ △ ● □
	2200	48+48 W	5160 lm	2259 mm	35 mm	95 mm	QM-WACBDJ ■ △ ● □
2	1100	24+24 W	2580 lm	1141 mm	35 mm	95 mm	QM-WACCBE ■ △ ● □
	1700	36+36 W	3870 lm	1700 mm	35 mm	95 mm	QM-WACCCG ■ △ ● □
	2200	48+48 W	5160 lm	2259 mm	35 mm	95 mm	QM-WACCDJ ■ △ ● □

⊕ 220÷240Vac | IP40

UP to 108 lm/W | L80/B20 80.000 h. | CRI>90 | UP to RGO | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - matt clear

Optical Info p. 532

### \* Select your option

CCT	■	Optic	△	Colour	●	Control #	□	# No 600 mm - Casambi
2700 K	1	Matt opal	E	White	W	On/Off	NF	** Only: 1100, 1700, 2200 mm DALI, Casambi.
3000 K	2	Matt clear	R	Black	B	DALI	DA	
4000 K	3			Silver	G	Casambi	CA	
Tunable **	4			Corten	C	Push	PU	
				Tobacco	O			

Quik offre grandi possibilità di customizzare secondo specifiche richieste se non previste dai modelli standard. custom@panint.it  
Quik offers a large possibilities to customize according to specific request as sizes, colors, long lines. custom@panint.it

Finishes

White Black Silver Corten Tobacco

